REV.	DESCRIPTION	DATE
A		
B		04-2008

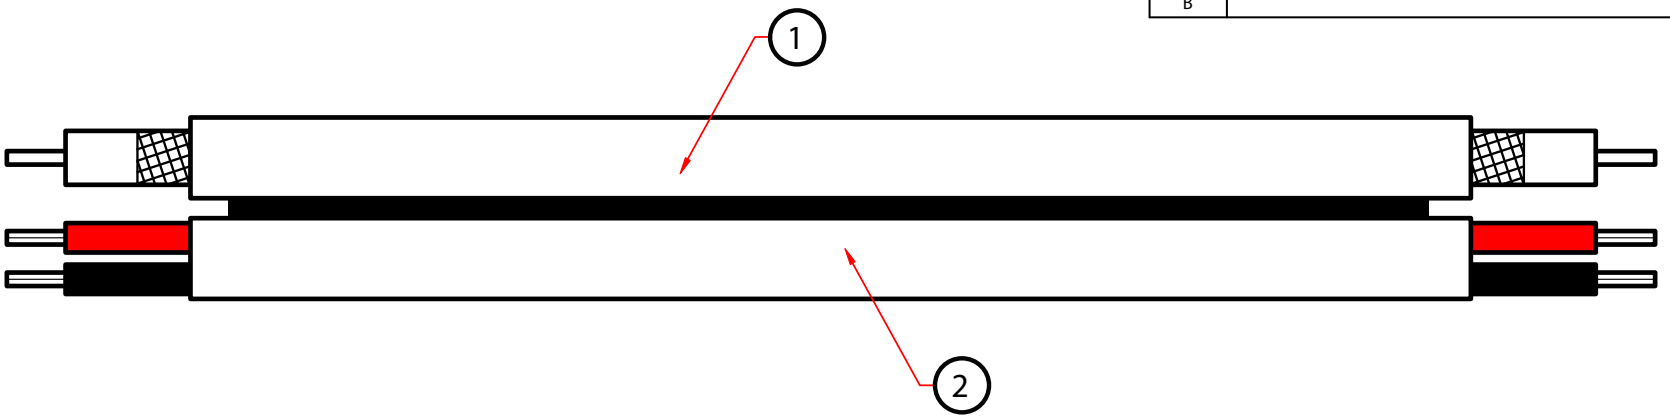

Coax Cable Specifications:

RG59 75 Ohm Coaxial Cable
20AWG 0.81mm Solid Bare Copper Center Conductor
3.66mm OD PE Dielectric
16/8/0.12mm CCA Braid (95% Coverage)
6.0mm OD Black PVC Jacket

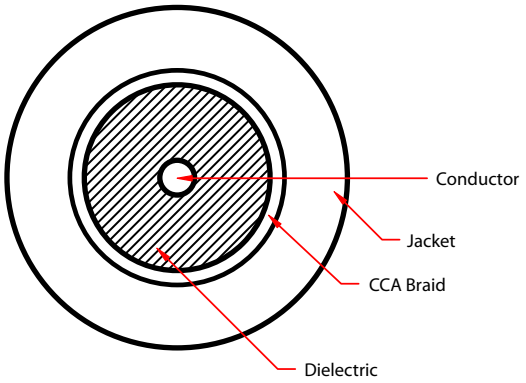

Power Cable Specifications:

2 x 18AWG 7*0.37mm Bare copper Stranded Center Conductor
Black and Red PVC Conductor Jackets
Insulation OD: 1.9+/-0.2mm
CM, 30V, 70C

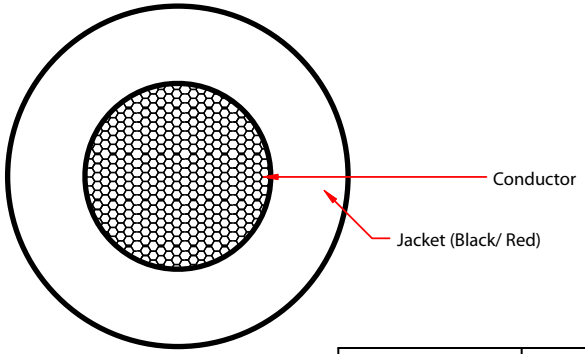

RoHS

PART NO.	CABLE LENGTH
10X3-18222NF	500 ft
10X3-18222NH	1000 ft

NO.	SPECIFICATIONS
2	18AWG Stranded Center Conductor, Insulation OD: 1.9+/-0.2mm, CM, 30V, 70C, Black and Red,OD:4..8+/-0.2mm,Black Outer PVC Jackets
1	RG59 Cable, CM, 75Ohm CCA Braided Shield, Black Outer PVC Jacket.

BOM LIST

ITEM NUMBER	10X3-18222Nx			DRAWER	MPD
TITLE	RG59 Siamese Solid Coaxial Cable + 18/2 (18AWG 2C) Power, Black, Spool			CHECKED	MAC
				APPROVED	MAC
MATERIAL		SCALE			
REV.	A	UNIT	INCH		
DRAWING NO:					

888-212-8295 CableWholesale.com